WEATHERLY INDEX

720

CATALOG No. 63

Swingspout

THE WORLD'S FINEST DISPENSING EQUIPMENT

service equipment

THE ORIGINAL CANSPOUT® FOR ALL TYPE CANS

5SJD

5SJA

5SG

- efficient
- indestructible
- modestly priced

CANSPOUT®			
ITEM	CAPACITY	UNIT PKG.	WT. LBS.
* 5SG	All Sizes	10	7¼
* 5SJA	All Sizes	1	½
* 5SJD	All Sizes	1	2

These original Canspouts® have often been copied but Never Duplicated. Tin, Aluminum and Foil Cans All open easily with this original Canspout®.

*Also available in Skin-Pak

cuts holes...drains... saves time...simple hand operation... no mess...no bother

service equipment

CANSPOUTS®

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
*N-1	1 and 5 qt. Cans	10	3
*N-5	1 and 5 qt. Cans	10	5¼
*N-5S	1 and 5 qt. Cans	10	6½
5S(P)	1 and 5 qt. Cans	10	6½
* 5SJ	1 and 5 qt. Cans	10	5
5SJ(P)	1 and 5 qt. Cans	10	5
9	Flexible Extension	6	2
*N-10	1 qt. and Smaller	10	1
* 10S	1 qt. and Smaller	10	1½
* 10LT	1 qt. and Smaller	10	1¼
* 12	For Dry Powder	1	¾

(P) Painted Finish
* Available in Skin-Pak

10S

N-5S
5S(P)
5SJ
5SJ(P)



N-1
N-5

N-10

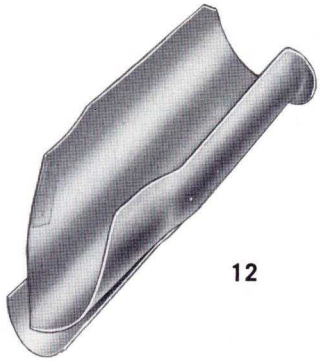

12

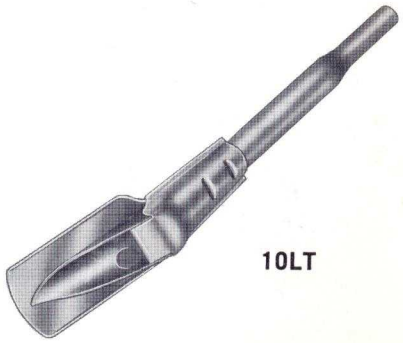

10LT

a great time and trouble saver

FLEXIBLE DETACHABLE CANSPOUT® EXTENSION

Flexible Detachable Canspout® Extension Fits either N-5S or N-5SJ Canspout® As Well As Oil Measures. Adds A Full 10″ length to All Spouts.

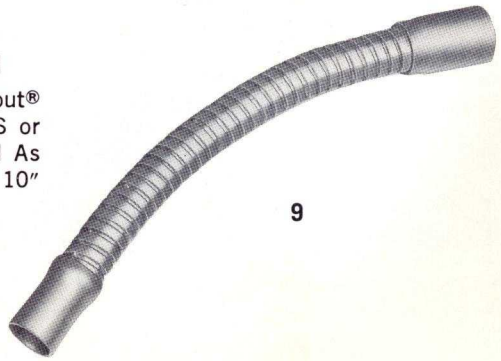

9

Swingspout

THE WORLD'S FINEST
DISPENSING EQUIPMENT

MEASURES AND DISPENSERS

REGULAR LONGSPOUT MEASURE

ITEM		CAPACITY	UNIT PKG.	WT. LBS.
COPPER PLATED	GOLDEN SHEEN			
300	310	1 Pt.	1	2
301	N-311	1 Qt.	1	2
302	N-312	2 Qt.	1	2¼
304	314	4 Qt.	1	3
305	N-315	5 Qt.	1	3¾
306	316	6 Qt.	1	4
308	318	8 Qt.	1	4½
395L	395LP	2½ Liter	1	2½

FLEXIBLE SPOUT OIL MEASURE

ITEM		CAPACITY	UNIT PKG.	WT. LBS.
COPPER PLATED	GOLDEN SHEEN			
N-321	331	1 Qt.	1	2
N-322	332	2 Qt.	1	2¼
N-324	334	4 Qt.	1	3
N-325	335	5 Qt.	1	3¾
N-326	336	6 Qt.	1	4¼
N-328	338	8 Qt.	1	4½

SEALDOIL DISPENSER

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
76	1 Qt., Rigid	1	3¼
N-77	5 Qt., Rigid	1	6
79	5 Qt., Flexspout	1	6

AUTOMATIC TRANSMISSION MEASURES

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
351	1 Qt.	1	2½
352	2 Qt.	1	2¾
355	5 Qt.	1	6
356	6 Qt.	1	6
358	8 Qt.	1	6

AUTOMATIC TRANSMISSION UNITS

N-68
1 Qt. Opener and Dispenser For Canned Oil. Has Hardened, Ground Cutter Blade For Easy Opening. A.T.* flexible Spout with Screen Strainer.

N-69
5 Qt. Opener and Dispenser For Canned Oil. Has Hardened, Ground Cutter Blade For Easy Opening. A.T.* flexible Spout with Screen Strainer.

N-74
Popular Fulvue† Funnel Equipment with Case Hardened, Easy Cutting Blade, Extra Long Flexspout and A.T.* Dispensing Tip with Screen Strainer. N-26 Available without Strainer Screen.

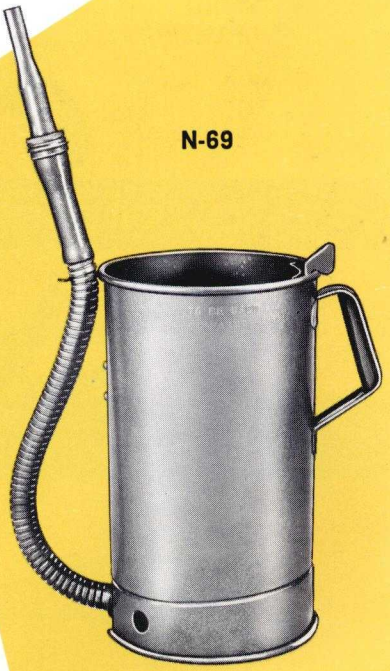

AUTOMATIC TRANSMISSION UNITS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
‡ 26	All Sizes	3	6
N-68	1 Qt.	1	3¼
N-69	5 Qt.	1	6
N-74	All Sizes	3	6½

A.T.* Automatic Transmission
‡ Not Shown
† Trademark

Full 17" Flexspout with Seamless Drawn Funnel At Top. Asbestos Packed Flexspout To Prevent Leakage.

TRANSPOUT

ITEM	CAPACITY	DIA	UNIT PKG.	WT. LBS.
462	All Sizes	5¼"	12	11

service equipment

FULVUE† FUNNEL DISPENSER

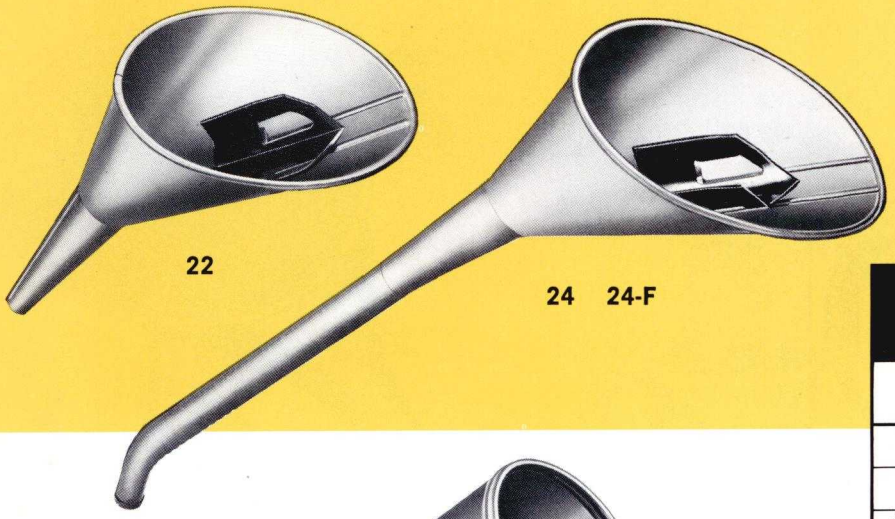

22

24 24-F

Flexible and Rigid Spout Openers and Dispensers Have Easy Cutting, Case Hardened Blade For Large Openings and Quick Drainage—Sloped Bottom For Complete Drainage.

FULVUE† FUNNEL DISPENSER

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
22	All Sizes	3	4½
24	All Sizes	3	5¾
‡ 24-F	All Sizes	3	5¾

RIGID SPOUT OPENER

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
20	1 Qt.	3	3¼

† Trademark F Flexspout ‡ Not Shown

RIGID SPOUT OPENER

20

OIL DRAINERS

N-83

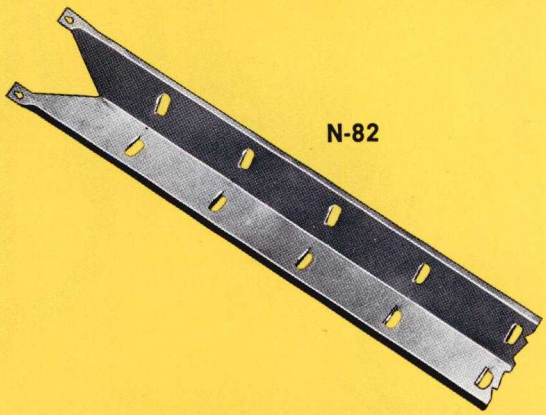

N-82

OIL DRAINERS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
N-82	1 and 5 Qt. Cans	1	2
N-83	1 and 5 Qt. Cans	1	4¾

Holds Six 1 Qt. Cans and One 5 Qt. Can In Proper Position For Speedy Draining.

HAN-D-GARD
Radiator Cap Wrench

99

GOLDEN SHEEN FINISH

HAN-D-GARD
Radiator Cap Wrench

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
99	All Sizes	1	1

FUNNEL MEASURES

FUNNEL MEASURES

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
110	1 Pt.	6	3½
111	1 Qt.	6	6
112	2 Qt.	6	8
114	4 Qt.	6	12
121	1 Qt.	6	6
122	2 Qt.	6	9
124	4 Qt.	6	13
151	1 Qt.	12	9
152	2 Qt.	12	12
154	4 Qt.	12	21

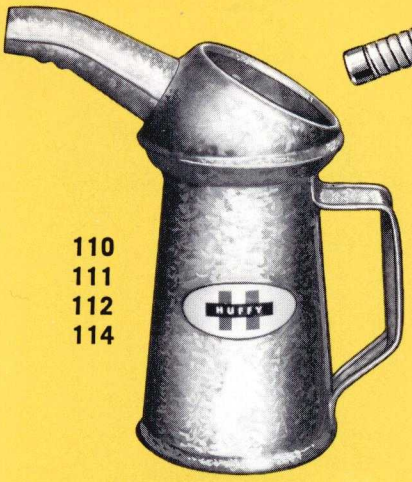

110
111
112
114

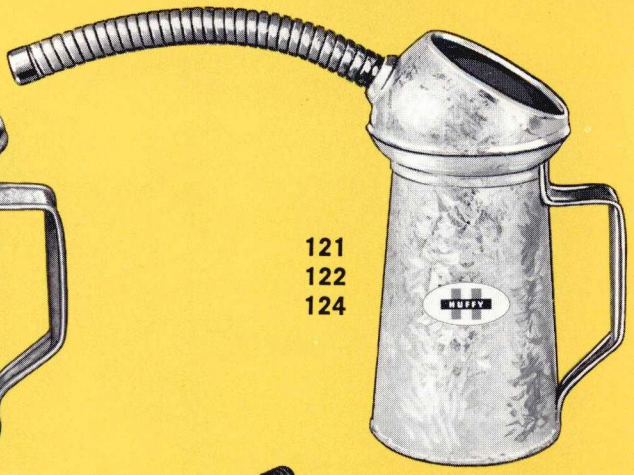

121
122
124

RADIATOR FILLERS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.	BAIL
N-102	3 Gal. Oval-Galvanized	6	25	Swing-Lock
N-104	3 Gal. Hufflex	4	9	Natural

151
152
154

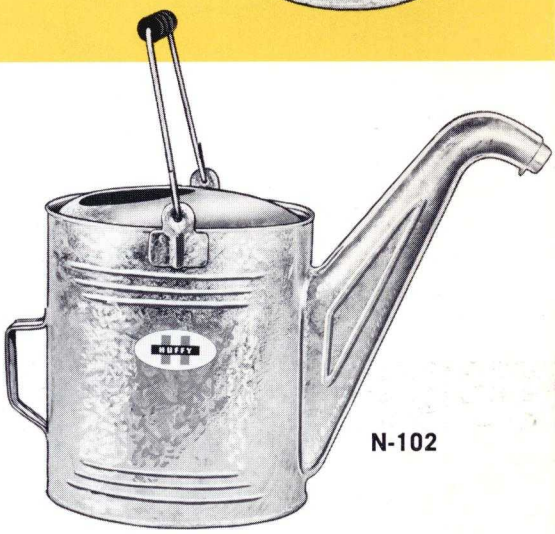

N-102

HUFFLEX® RADIATOR FILLER

ITEM	CAPACITY	UNIT PKG.	WT. LBS.	BAIL
N-104	3 Gal.	4	9	Natural

HUFFLEX® BATTERY FILLER

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
N-108	2 Qt. (plus)	1	2

HUFFLEX

HUFFLEX®

HUFFLEX® is a rough, tough plastic that has been engineered and field tested for Huffy service equipment use. Hufflex® will not scratch or mar surfaces—will not dent or leak when bumped or dropped. No seams—no sharp edges.

N-108

N-104

service equipment

DRAIN PANS

174

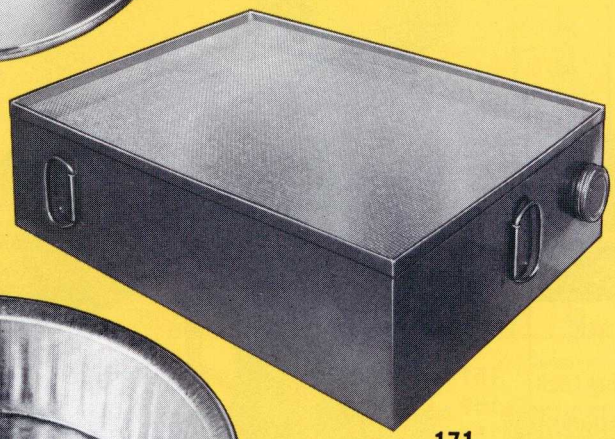

171

172

DRAIN PANS			
ITEM	CAPACITY	UNIT PKG.	WT. LBS.
171	7 Gal.	1	10
172	3¼ Gal.	6	15
174	7 Gal.	2	12

"HOT DIPPED" GALVANIZED WARE

"Hot Dipping"—the process used on our galvanized service equipment—deposits a uniform layer of zinc coating that closes and seals all seams and crevices.

GARAGE PAIL

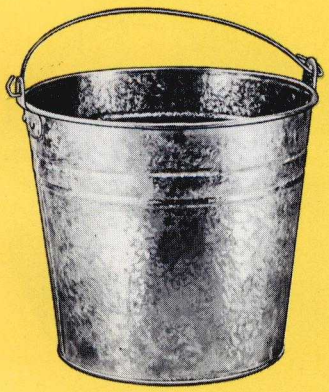

N-162

TUBE TEST TANK

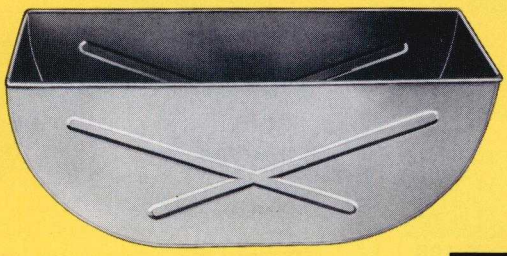

109

TUBE TEST TANK			
ITEM	SIZE	UNIT PKG.	WT. LBS.
109	31″ x 12″ x 12″	3	31

GARAGE PAIL				
ITEM	CAPACITY	UNIT PKG.	WT. LBS.	BAIL
N-162	3 Gal.	12	24	Swing

OILY WASTE CAN

OILY WASTE CAN

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
180	5 Gal.	1	12
181	6½ Gal.	1	14
182	8 Gal.	1	16
N-190	10 Gal.	1	19
N-196	6 Gal.	1	15

180
181
182

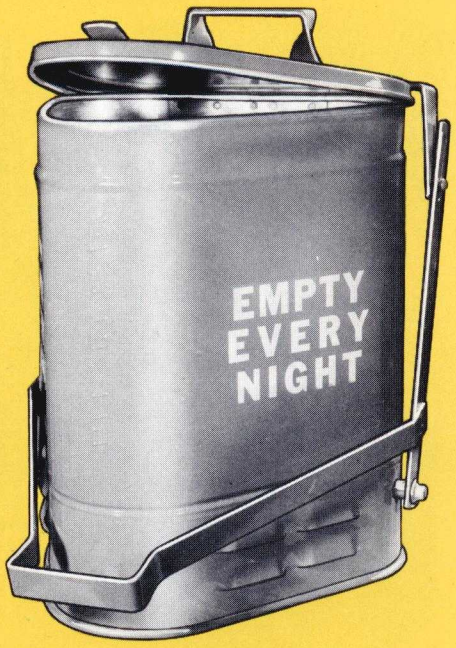

N-190
N-196

DRUM LID AND DRUM DOLLY

DRUM LID

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
183	For 55 Gallon	1	9

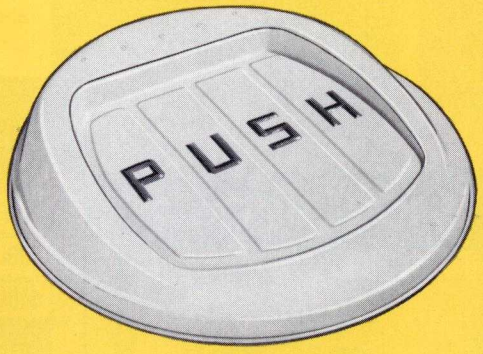

183

Smooth "Big Top" drum lid for 55 gallon drum or barrel with adequate flap opening and 360° receptability. Dispose of bulky materials from any angle. Reduces fire hazards. Keeps insurance rates as low as possible.

DRUM DOLLY

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
184	600 Lbs.—25″ O.D.	1	17½

184

Rugged, all-steel construction. Reinforced with stout, steel, cross-braces. Stem type, 3″ Neoprene wheel, ball bearing coasters. Converts storage Drums or barrels up to 25″ O.D. into mobile containers. 600 lbs. Capacity.

service equipment

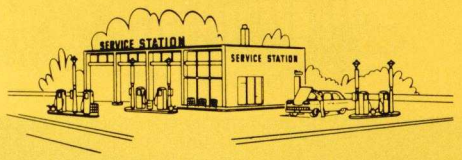

GALVANIZED FUNNELS

426
428

429

423

436
438

410
411
412
414

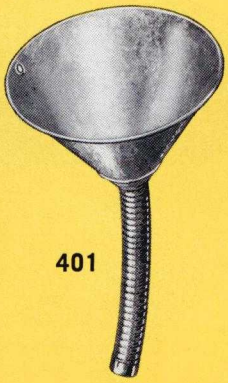
401

421
422

TIN FUNNELS AND FUNNELSPOUT

N-450
N-451
N-452
N-454

460—Painted
Funnelspout

439
440
441
442
444

GALVANIZED FUNNELS

ITEM	CAPACITY	DIAMETER	UNIT PKG.	WT. LBS.
(A) 400	—	—	1	—
401	1 Qt.	6¾″	6	5
410	1 Pt.	5¼″	12	4
411	1 Qt.	6¾″	12	6
412	2 Qt.	8⅜″	12	9
414	4 Qt.	9⅜″	12	12
421	1 Qt.	4¼″	12	4
422	2 Qt.	6¼″	12	7
423	Utility	9¼″	12	25
426	6 Qt.	10¼″	3	6
428	8 Qt.	12″	3	7
429	Tractor	10¼″	6	13
436	6 Qt.	10″	3	5
438	8 Qt.	12″	3	9

(A) No. 400, brass strainer, is available for items 401, 410, 412 and 414 (galvanized funnels) and items N-450, N-451, N-452 and N-454 (tin funnels) below.

(A) No. 400, brass strainer, is available for items N-450, N-451, N-452 and N-454 (tin funnels) and items 401, 410, 412 and 414 (galvanized funnels) above.

TIN FUNNELS AND FUNNELSPOUT

ITEM	CAPACITY	DIAMETER	UNIT PKG.	WT. LBS.
439	½ Pt.	3″	36	3
440	1 Pt.	4¼″	36	5
441	1 Qt.	5½″	36	7
442	2 Qt.	6¼″	36	8
444	4 Qt.	7½″	36	12
N-450	1 Pt.	5¼″	12	3
N-451	1 Qt.	6¾″	12	4
N-452	2 Qt.	8¾″	12	6
N-454	4 Qt.	9⅜″	12	9
460	—	5¼″	6	2½
‡ 462	—	5¼″	12	11

‡ Not Shown

the world's finest dispensing equipment

OIL BOTTLES–SPOUTS SETS

ITEM	DESCRIPTION	UNIT PKG.	WT. LBS.
527	Pourspout, Dust Cap & Gasket	12	1
528	Flexspout, Dust Cap & Gasket	12	2
‡529	Bottle, Flexspout, Dust Cap & Gasket	12	21
530	Oil Bottle Set with Pourspouts	1	17
531	Oil Bottle Only	12	19
532	Dust Cap Only	12	½
533	Gasket Only	12	½
534	Pourspout Only	12	½
‡535	Oil Bottle Set with Flexspout	1	18
537	Botlspout	10	3½
538	Basket Only	1	3
539	Bottle, Pourspout, Dust Cap & Gasket	12	20

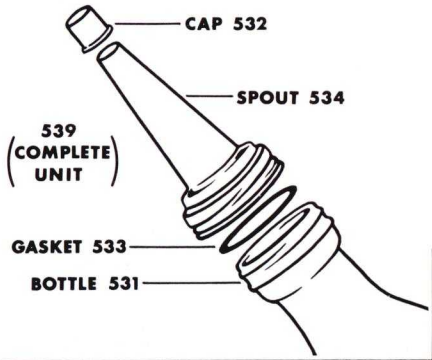

OIL BOTTLES–SPOUTS–SETS

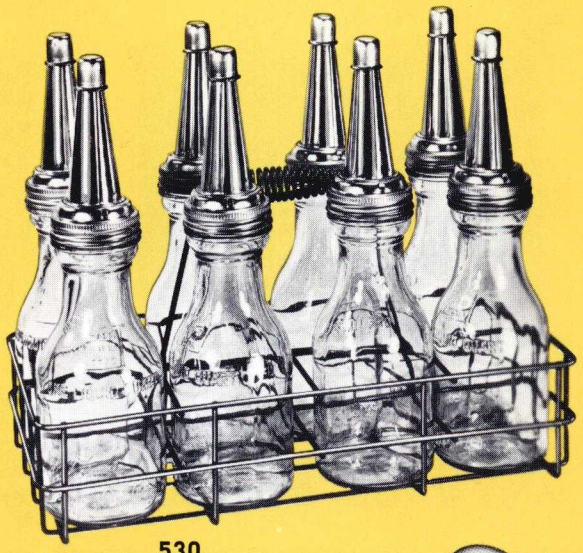

LIFT DRAIN

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
579-R	5 Gal.—Red	1	14
579-W	5 Gal.—White	1	14

TEST MEASURE

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
555	5 Gal.	1	12

ALCOHOL DISPENSER

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
N-558	Drum	6	18

‡ Not Shown

ALCOHOL DISPENSER

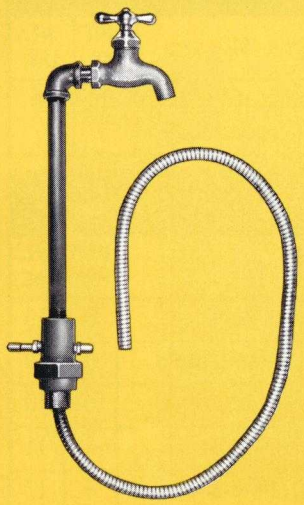

N-558

TEST MEASURE

555

LIFT DRAIN

service equipment

CREEPERS AND CASTERS

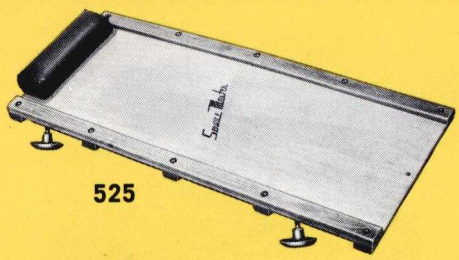
525

523
526

525-C

▼ Adjustable Head Rest
Extra Long

522

CREEPERS AND CASTERS

ITEM	SIZE	UNIT PKG.	WT. LBS.
522	42″ x 15⅜″	2	35½
523	36″ x 15⅛″	1	13
‡523-C	Replacement Caster	4	1
525	36″ x 15⅜″	2	28
525-C	Replacement Casters (For 522, 525 and 526)	4	1
526	36″ x 15⅛″	1	14

New off-set casters assure smooth and easy operation. Used on steel or wood bodies.

‡ Not Shown

HAND PUMPS

MECHANICS SEAT AND TOOL TRAY

521

MECHANICS SEAT AND TOOL TRAY

ITEM	SIZE	UNIT PKG.	WT. LBS.
521	15″ x 15″ x 12″ (Shipped K.D.)	1	15

HAND PUMPS

ITEM	USE	UNIT PKG.	WT. LBS.
559	Gearcase Cleaner	6	10
560	Marine Motor Cleaner	6	9
561	Marine Motor Cleaner	6	10
562	Oil & Grease Gun	6	11
563	Barrel Drainer & Cleaner	6	17
564	Differential Cleaner	6	11
565	Hypoid Gun	6	10

CAN CRUSHERS
Hand and Air Operated

ITEM	FOR	UNIT PKG.	WT. LBS.
N-510	1 Qt.	1	20
515	Air—1 Qt.	1	22

(Air Operated)

515

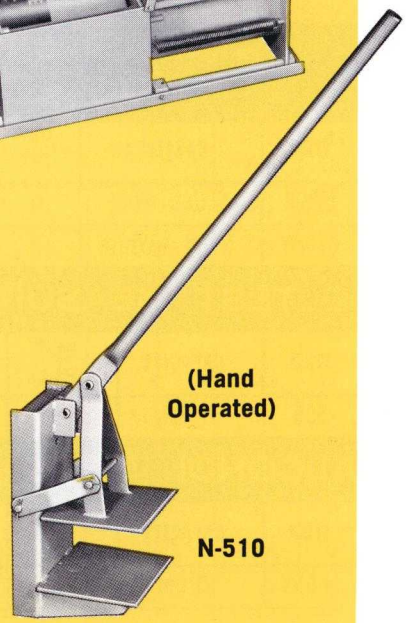

(Hand Operated)

N-510

GASOLINE CANS—SAFETY AND MOTOR BOAT

600 SERIES GASOLINE CANS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
601	1 Gal.	6	15
601-F	1 Gal.	6	15
602	2 Gal.	6	19
602-F	2 Gal.	6	20
602½	2½ Gal.	4	14
602½-A	2½ Gal. w/Measure	4	14
602½-F	2½ Gal.	4	14
605	5 Gal.	4	20
605-F	5 Gal.	4	22
‡607	Measure	1	—

HEAVY DUTY FILLER CAN

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
620	5 Gal.	4	30

MOTOR BOAT CAN

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
642½	2½ Gal.	4	18

HEAVY DUTY GASOLINE CANS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
612½-F	2½ Gal.	4	18
‡615	5 Gal.	4	27
615-F	5 Gal.	4	29

GALVANIZED GASOLINE CANS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
‡611	1 Gal.	12	19
‡625	5 Gal.	4	19
625-F	5 Gal.	4	22

‡ Not Shown F—Flexspout

600 SERIES Gasoline Cans

601-F 602½-A
602-F 602½-F
605-F

601
602
602½
605

HEAVY DUTY FILLER CAN

620

MOTOR BOAT CAN

642½

HEAVY DUTY GASOLINE CANS

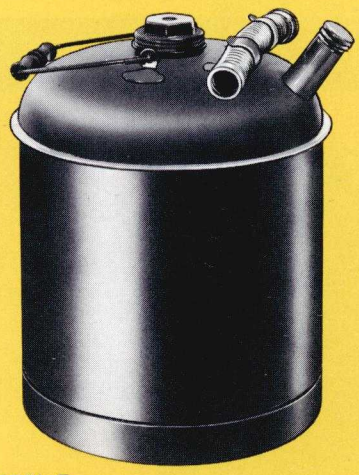

612½-F
615
615-F

GALVANIZED GASOLINE CANS

611
625
625-F

gasoline cans

SAFETY GASOLINE CANS
Flexible Pour Spout

631 632½ 635

Underwriters Laboratory and Factory Mutual Approved. All steel construction.

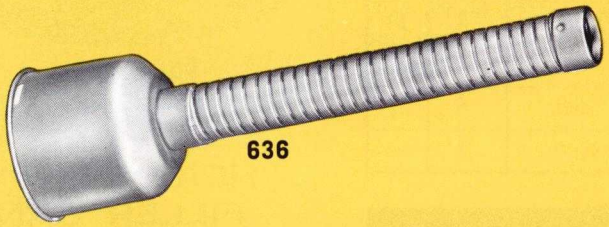

636

SAFETY GASOLINE CANS
Flexible Pour Spout

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
631	1 Gal.	6	16
632½	2½ Gal.	4	23
635	5 Gal.	4	31
636	Flexspout	1	¾

GASOLINE CANS—LIGHTWEIGHT

655-F

652½-F

GASOLINE CANS LIGHTWEIGHT

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
652½-F	2½ Gal.	6	19
655-F	5 Gal.	6	25

Not U. L. or F. M. approved.

ECONOMY GASOLINE CANS

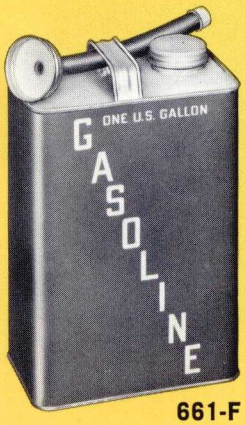

661-F

662-F

ECONOMY GASOLINE CANS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
661-F	1 Gal.	24	28
662-F	2 Gal.	12	20

F—Flexspout

hand oilers and pump oilers

HAND OILERS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
813	⅓ Pt.—3″ Spout	12	3
813-A	⅓ Pt.—5″ Spout	12	3
813-F	⅓ Pt.—7″ Spout	12	3
814	⅓ Pt.—9″ Spout	12	3
814-F	½ Pt.—7″ Spout	12	4
815-F	1 Pt.—7″ Spout	12	5

F—Flexspout

PUMP OILERS

ITEM	CAPACITY	UNIT PKG.	WT. LBS.
827	¾ Pt.	6	5
827-A	¾ Pt.	6	4
827-F	¾ Pt.	6	5
828	1 Pt.	6	8
829	⅓ Pt.	6	3
‡829-F	⅓ Pt.	6	4
830	6 oz.	6	4
‡830-F	6 oz.	6	5
831	4 oz.	6	3
834	¾ Pt.	6	5
834-F	¾ Pt.	6	5
835	1 Pt.	6	5
835-F	1 Pt.	6	5
836	1½ Pts.	6	6½
836-F	1½ Pts.	6	6½
837	1 Qt.	6	7
837-F	1 Qt.	6	7¼
838-F	1 Pt.	6	7
839-F	1 Qt.	6	9

F—Flexspout
‡ Not Shown

Swingspout

SUPERIOR QUALITY!

The Swingspout THUMB ACTION RELEASE VALVE on all oil measures, permits one hand operation — the other hand is free to handle cloth or oil filler cap.

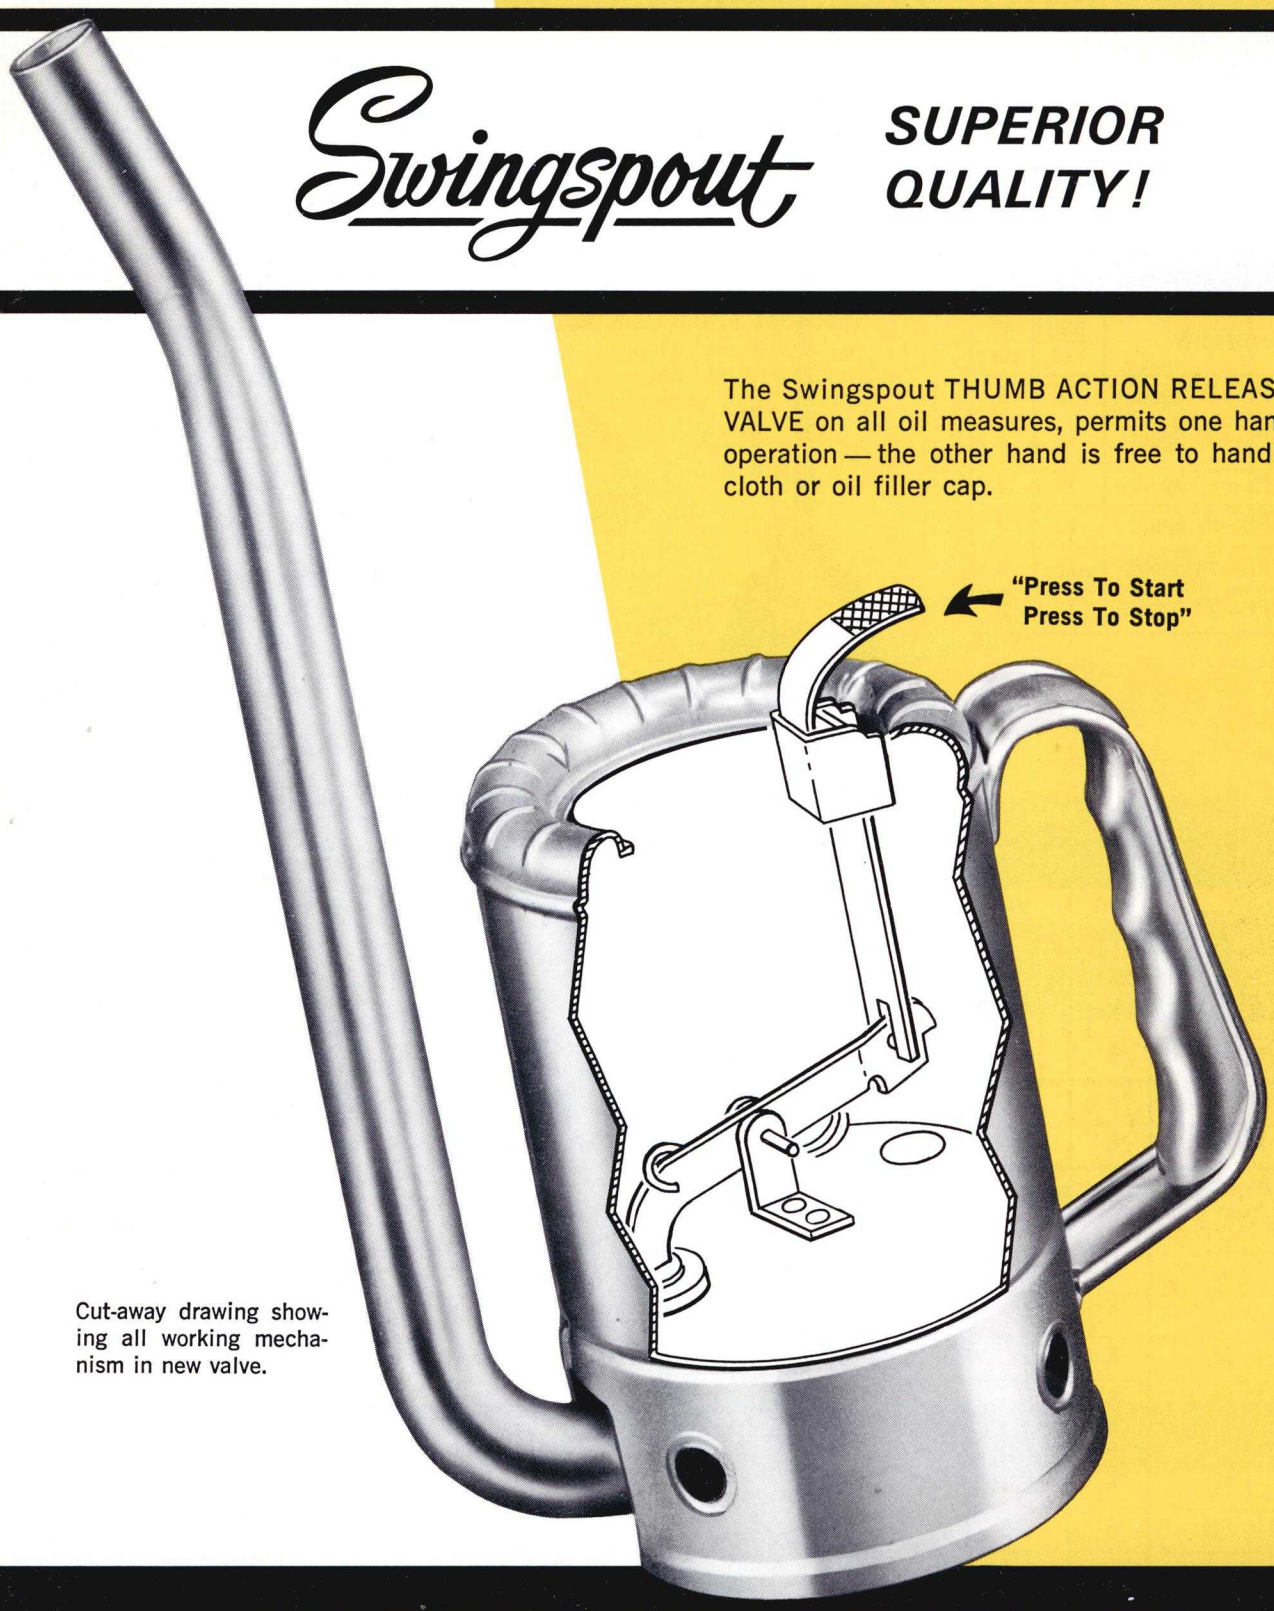

Cut-away drawing showing all working mechanism in new valve.

SWINGSPOUT PRODUCTS

THE HUFFMAN MANUFACTURING COMPANY

SERVICE EQUIPMENT DIVISION

Azusa, California
1120 West Foothill Blvd.
Phone: 334-1261
Area Code: 213

Chicago, Illinois
Room 852
120 South LaSalle Bldg.
Phone: 236-4438
Area Code: 312

Delphos, Ohio
P.O. Box 310
Ohio Street
Phone: 692-4811
Area Code: 419

15 M 1063 R

Litho in U.S.A.